

▶ Product Features

- Compact size (2.9 X 3.9mm)
- Slim thickness
- Multiple options of stems & force
- Boss at bottom for better positioning
- RoHS Compliant




▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	LCP	Stainless Steel	LCP	Silver plated Stainless Steel	Silver plated Phosphor Bronze

▶ Specification

Operating Force	90 ~ 250 gram
Actuator Travel	0.13 ± 0.05mm
Operating Temperature Range	-30°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	100,000
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

▶ Part Number

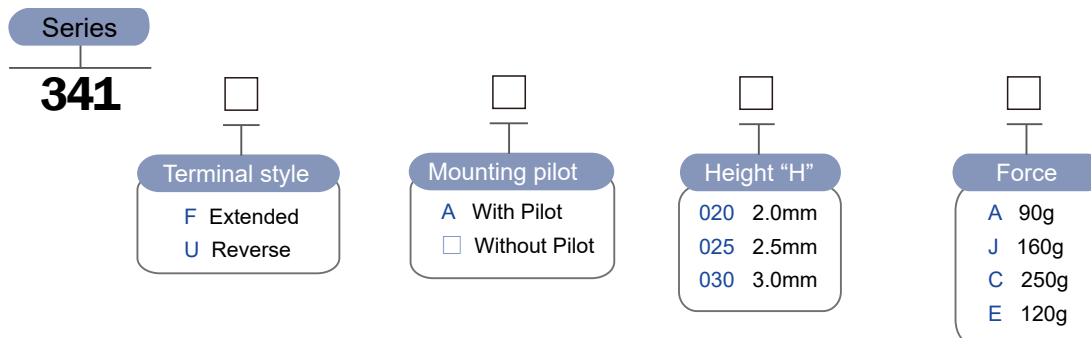

► Diagram

No.	Dimensions	Circuit Diagram Pad Layout						
1	<p>● 341F</p>	<table border="1"> <tr><th>H</th></tr> <tr><td>1.5</td></tr> <tr><td>2.0</td></tr> <tr><td>2.5</td></tr> <tr><td>3.0</td></tr> </table>	H	1.5	2.0	2.5	3.0	
		H						
1.5								
2.0								
2.5								
3.0								
2	<p>● 341U</p>	<table border="1"> <tr><th>H</th></tr> <tr><td>1.5</td></tr> <tr><td>2.0</td></tr> <tr><td>2.5</td></tr> <tr><td>3.0</td></tr> </table>	H	1.5	2.0	2.5	3.0	
		H						
1.5								
2.0								
2.5								
3.0								