

### ▶ Product Features

- Rectangular packaging to save space
- Multiple options of stems and force
- Metal bracket to support side actuation
- RoHS Compliant




### ▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PA6T	Tin plated Steel	PA6T	Silver plated Stainless Steel	Silver plated Brass

### ▶ Specification

Operating Force	70 ~ 320 gram
Actuator Travel	0.25 ± 0.1mm
Operating Temperature Range	-30°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	50,000(70 ~ 200g) ; 30,000 (250g)
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

### ▶ Part Number

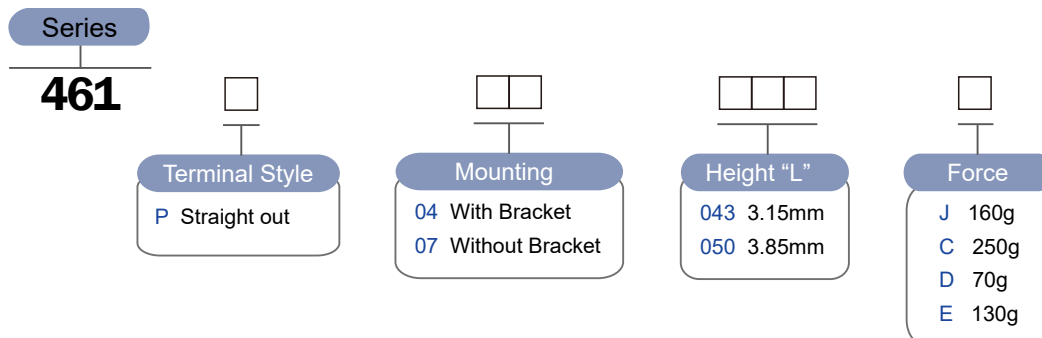

► Diagram

No.	Dimensions	Circuit Diagram				
		Pad Layout				
1	<p>● 461P04</p>	<table border="1"> <tr><td>L</td></tr> <tr><td>3.15</td></tr> <tr><td>3.85</td></tr> </table>	L	3.15	3.85	
			L			
3.15						
3.85						
2	<p>● 461P07</p>	<table border="1"> <tr><td>L</td></tr> <tr><td>3.15</td></tr> <tr><td>3.85</td></tr> </table>	L	3.15	3.85	
			L			
3.15						
3.85						