

▶ Product Features

- Multiple options of stems & force
- Metal bracket or plastic boss to support side actuation
- RoHS Compliant




▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	LCP	Tin plated Brass	LCP	Silver plated Stainless Steel	Silver plated Brass

▶ Specification

Operating Force	70 ~ 320 gram
Actuator Travel	0.25 ± 0.1mm
Operating Temperature Range	-30°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	50,000 (70~200g); 30,000 (250~320g)
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

▶ Part Number

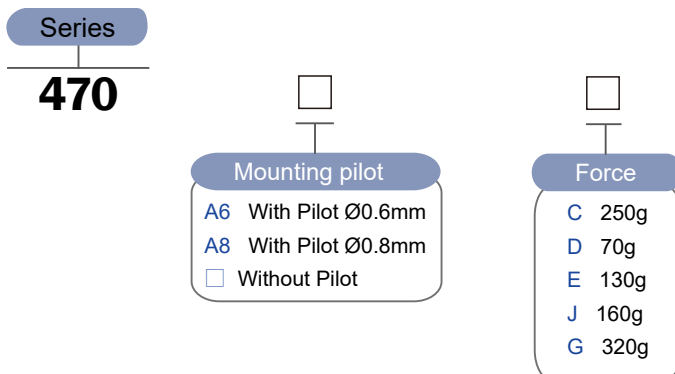

► Diagram

No.	Dimensions	Circuit Diagram Pad Layout			
1	<p>● 470A</p> <p> <table border="1" data-bbox="1050 546 1120 622"> <tr><td>A</td></tr> <tr><td>φ0.6</td></tr> <tr><td>φ0.8</td></tr> </table> </p>	A	φ0.6	φ0.8	
A					
φ0.6					
φ0.8					
2	<p>● 470</p>				