

Product Features

- 500,000 operational life
- Custom options available




Materials

Pusher	Dust protection cap	Case	Spring	Contact	Terminal
POM Natural	POM	PA Nature glass fiber reinforced	Piano Wire	Brass Gold plated	Brass Gold flash plated

Specification

Operating Temperature	-40°C to +85°C
Operating Force	Force1: 5~7N : Force2: 10~13N
Travel	2.0mm
Operating Speed	10mm/sec
Power Rating	28 VDC at 30mA
Operating Frequency	25-30 operation cycles per minute
Electric Life	20,000
Dielectrical Strength	100VAC for 1-minute
Life Cycle	500,000

Part Number

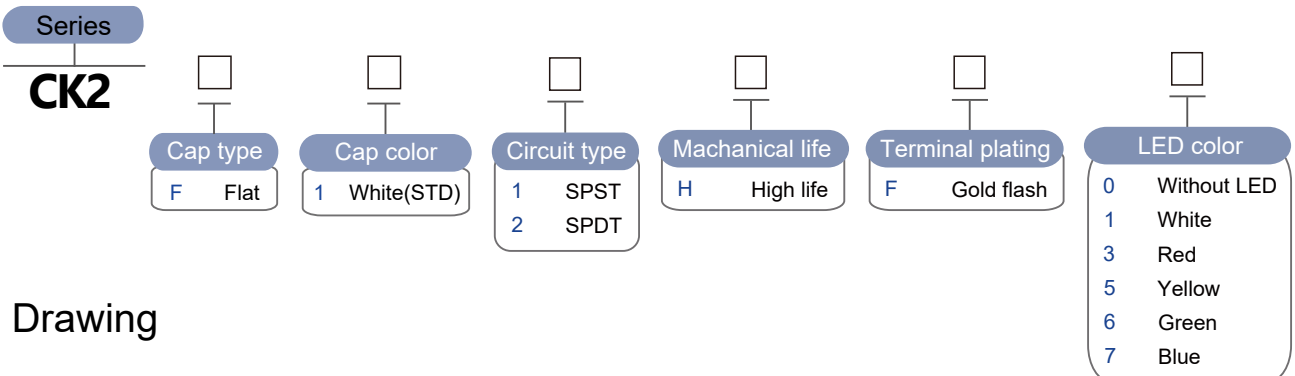

Drawing

