


### ▶ Product Features

- Standard 2.54mm pitch
- Side actuation
- 1-10, 12 positions
- RoHS compliant




### ▶ Materials

Part Name	Base	Cover	Actuator	Contact	Terminal
Material	PBT	PBT	PBT	Gold plated Copper alloy	Gold plated Copper alloy




### ▶ Specification

Operating Force	200 gram max.
Soldering Condition	260°C for 5 sec. or 320°C for 2 sec.
Operating Temperature Range	-40°C ~ 85°C
Non-switching Rating	100mA, 50VDC
Actuation Life Cycle	3,000
Insulation Resistance	100 MΩ min @ 500VDC
Dielectric Strength	500VAC for 1 minute
Contact Resistance	50mΩ max., Initial




### ▶ Part Number

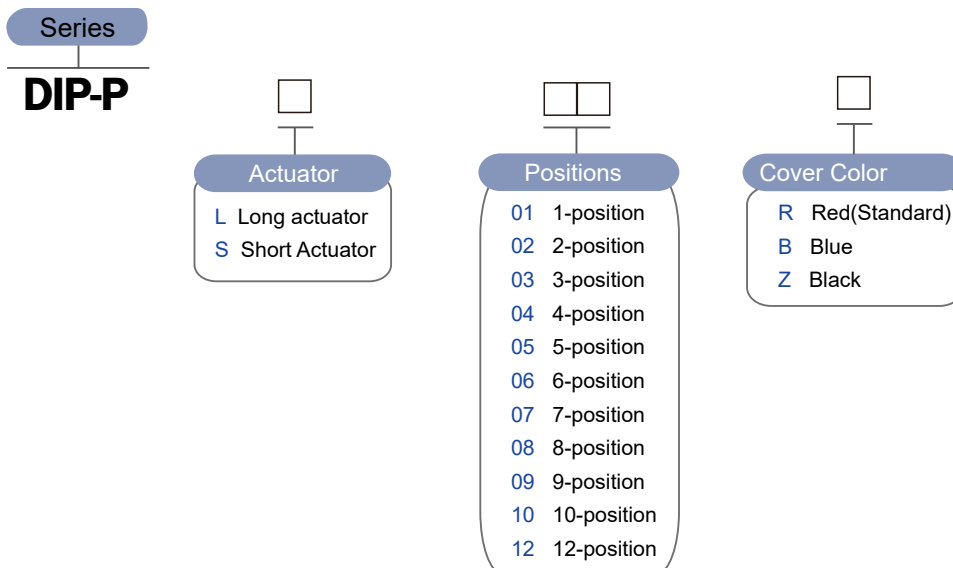




### DIP-PS, Short Actuator

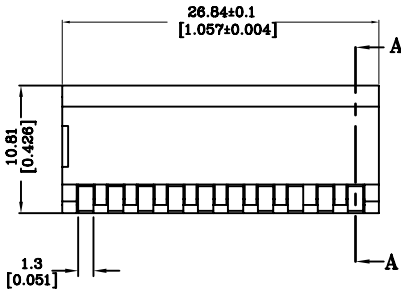

Position	A
01	3.98
02	6.60
03	9.14
04	11.68
05	14.14
06	16.68
07	19.22
08	21.84
09	24.30
10	26.84
12	31.92

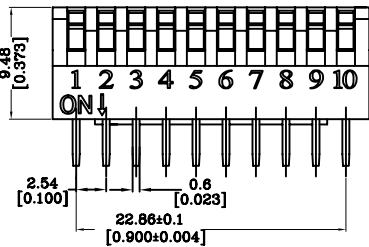

### DIP-PL, Long Actuator



Position	A
01	3.98
02	6.60
03	9.14
04	11.68
05	14.14
06	16.68
07	19.22
08	21.84
09	24.30
10	26.84
12	31.92

