



#### SPECIFICATIONS

**POLE-POSITION** : Momentary Type, SPST with LED

**CONTACT RATING** : 30V DC, 0.1A

**CONTACT RESISTANCE** : 50mΩ max. 1.5V DC ; 100mA,  
by Method of Voltage DROP

**INSULATION RESISTANCE** : 100 MΩ min. 500V DC

**DIELECTRIC STRENGTH** : 500V AC for 1 Minute

**OPERATING FORCE** : 250±100gf

**OPERATING LIFE** : 50,000 cycles

**OPERATING TEMPERATURE RANGE** : -40°C ~ 85°C

**TOTAL TRAVEL** : 1.2±0.3mm

#### Materials

**CAP** : PC

**CASE & HOUSING** : Nylon 6/6

**TERMINALS** : Copper alloy with gold plated.



#### HOW TO ORDER

MODEL NO. LED COLOR


PABL

Led color


ITEM NO	COLOR
01	White
03	Red
05	Yellow
06	Green
07	Blue
76	Blue (Green)

#### PCB MOUNTING & CIRCUIT DIAGRAM



PCB mounting




Single LED




Dual colors LED

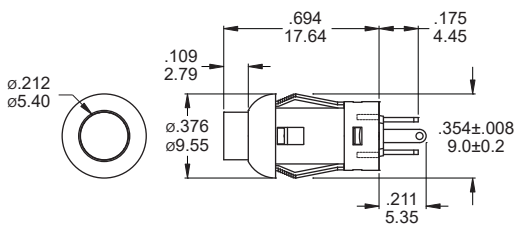


Part No. Shown : PABL-XX





PANEL MOUNTING



Non-LED

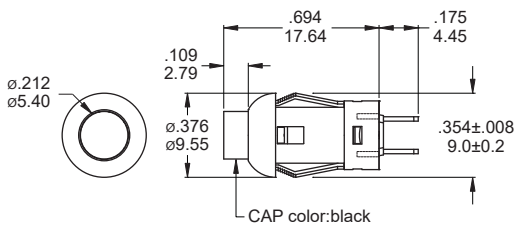

Part No. Shown : PABL-A2



PANEL MOUNTING

