


▶ Product Features

- Soft rubber actuator
- 0.35mm long travel
- Multiple options of operating force
- RoHS Compliant

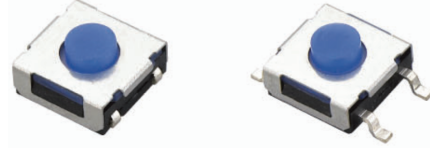

▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PA6T	SUS	Rubber	SUS Ag plated	Ag plated Brass

▶ Specification

Operating Force	160~400 gf
Actuator Travel	0.35 mm
Operating Temperature Range	-30°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	200,000(160-250gf) ; 100,000 (320-400gf)
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

▶ Part Number

