

## ▶ Product Features

- Dual tact switches
- Side actuation
- Multiple stem options
- Robust mounting bracket
- RoHS Compliant




## ▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PPA	Stainless Steel	PPA	Silver plated Stainless Steel	Silver plated Phosphor Bronze

## ▶ Specification

Operating Force	160, 250 gram
Actuator Travel	0.25
Operating Temperature Range	-30°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	100,000
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

## ▶ Part Number

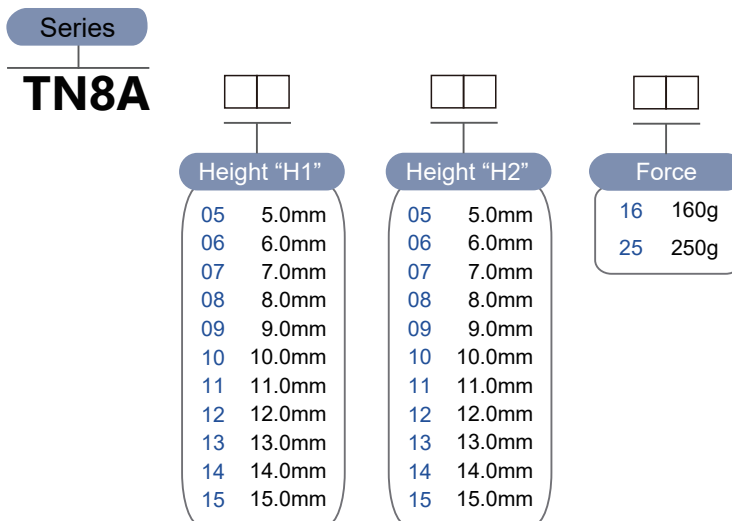

### TN8A

