

Product Features




- Miniature package for space saving
- Low operating force
- Slide actuated
- RoHS Compliant



Specification

Operating Force	80gf max.
Operating Temperature Range	-20°C ~ 80°C
Voltage Rating	5VDC, 20mA
Actuation Life Cycle	20,000
Insulation Resistance	20 MΩ min @ 250VDC
Dielectric Strength	250 VAC for 1 minute
Contact Resistance	200mΩ max.

Drawing

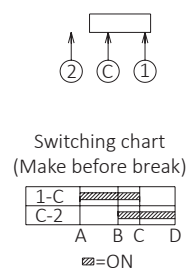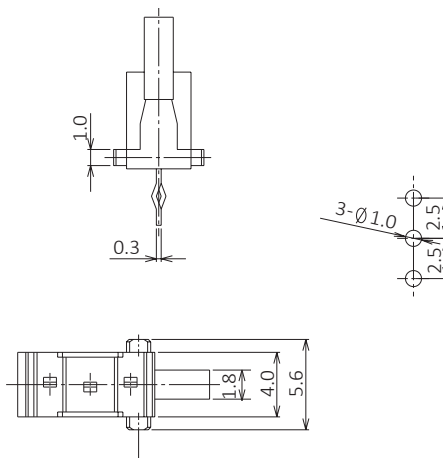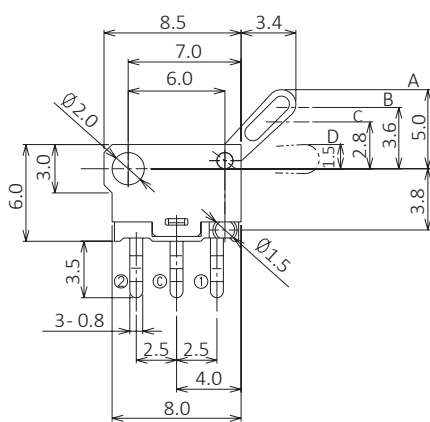

Above Part No. is DS4-M1