


► Product Features

- Compact size (3.0 X 2.5 mm)
- 1.5mm thin thickness
- Large soldering area
- RoHS Compliant




► Materials

Part Name	Base	Cover	Tape	Stem	Contact	Terminal
Material	LCP	Stainless Steel	PI	LCP	Silver plated Stainless Steel	Silver plated Phosphor Bronze





► Specification

Operating Force	160, 250 gram
Actuator Travel	0.15 mm
Operating Temperature Range	-25°C ~ 70°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	200,000
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

► Part Number




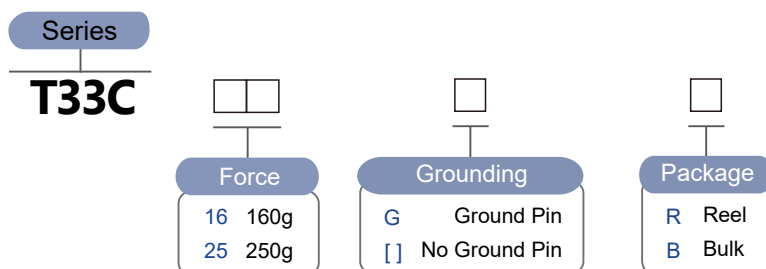


T33C_G

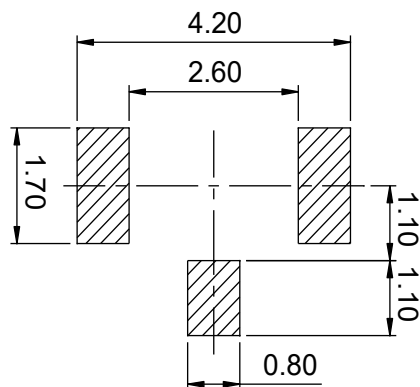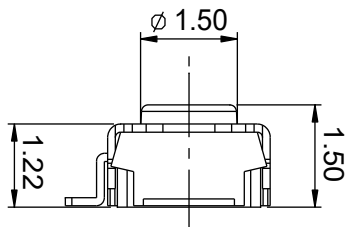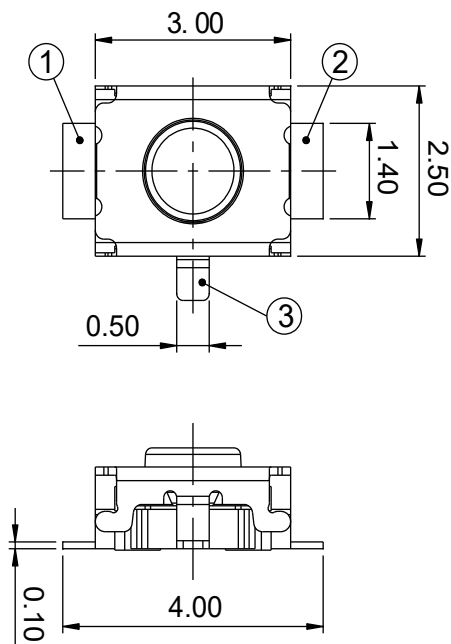

P.C.B LAND DIMENSION

T33C

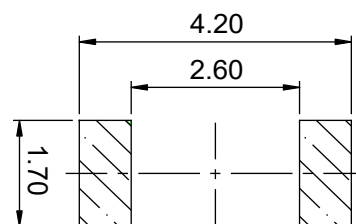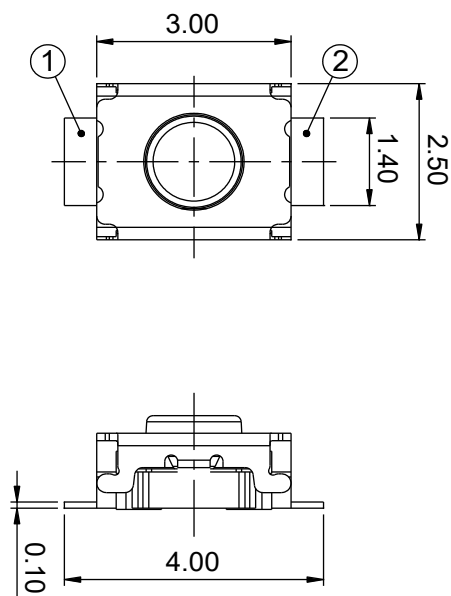

P.C.B LAND DIMENSION