

► Product Features

- Compact size (5.0 X 5.0 mm)
- 0.9 mm thin thickness
- Multiple options of force
- RoHS Compliant




► Materials

Part Name	Base	Cover	Contact	Terminal
Material	LCP	SUS/Phosphor bronze Silver plated	Silver plated Stainless Steel	Silver plated Brass




► Specification

Operating Force	90, 160, 250 gram
Actuator Travel	0.25
Operating Temperature Range	-20°C ~ 70°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	100,000
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

► Part Number



► Drawing

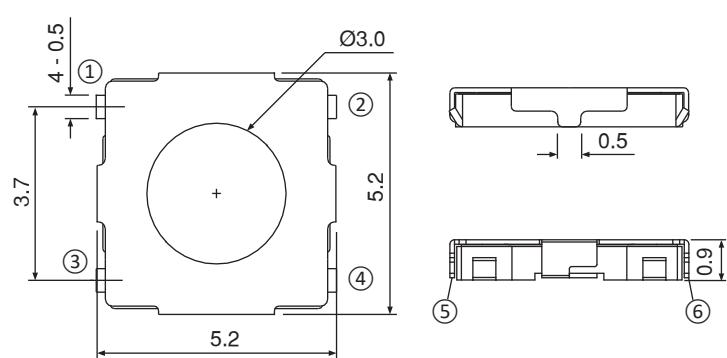

P.C.B Layout