


#### Product Features

- 0.55mm thin thickness
- 100,000 operational life
- Dust-proof design
- Large operational area
- Custom options available




#### Materials

| Part Name | Base | Contact              | Terminal               |
|-----------|------|----------------------|------------------------|
| Material  | LCP  | SUS<br>Silver plated | Brass<br>Silver plated |

#### Specification

|                       |                     |
|-----------------------|---------------------|
| Operating Temperature | -20°C to +70°C      |
| Operating Force       | 160, 200, 250 gf    |
| Travel                | 0.20mm              |
| Total Height          | 0.55mm              |
| Power Rating          | 12 VDC at 50mA      |
| Contact Resistance    | 100mΩ               |
| Insulation Resistance | 100MΩ min @ 100VDC  |
| Dielectrical Strength | 250VAC for 1 minute |
| Life Cycle            | 100,000             |

#### Part Number

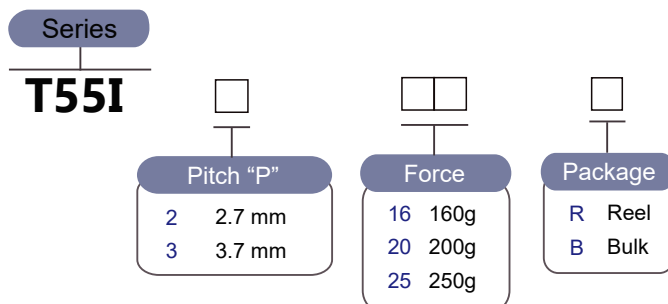

#### Drawing

