

Product Features

- 6.0 X 4.0mm packaging
- Robust design
- Multiple options of force and stems
- RoHS Compliant




Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	LCP	SUS	PA46	Silver plated Stainless steel	Silver plated Brass

Specification

Operating Force	160, 220 gram
Actuator Travel	0.30 mm
Operating Temperature Range	-20°C ~ 70°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	100,000
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max.

Part Number

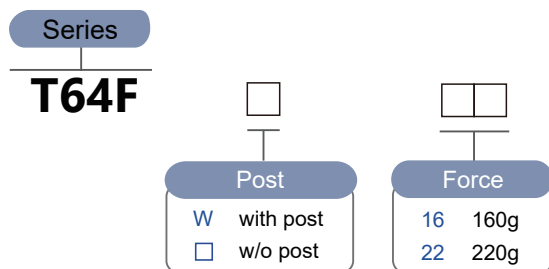

Drawing

